


**32"**  
MAX

**2.2-20lbs**  
RATED


**Human Active Technology**  
800 524 2744  
customerservice@team-hat.com  
team-hat.com

# PARTS LIST


A Top Down Mount 1x  
8524



B Quick Connect VESA Plate 1x  
114808




C M4 x 12mm Phillips Pan Head Screw 4x  
701153




D 3/32" Allen Wrench 1x  
700146




E 6mm Allen Wrench 1x  
717654




F 4mm Allen Wrench 1x  
709877




G 5mm Allen Wrench 1x  
710838



H\* M8-1.25 X 100mm L SHCS 1x  
712262



I\* Spacer 1x  
701544




J\* Lock Nut 1x  
710015





# DESK CLAMP CONFIGURATION


1



Desk thickness  
up to 1.5" (3.8 cm)

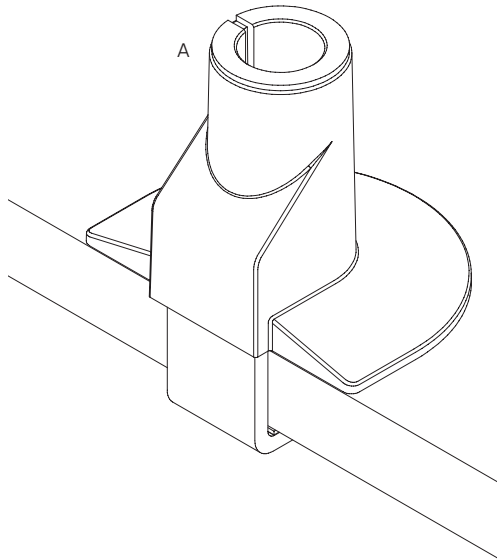



Desk thickness  
up to 1.5" (3.8 cm)

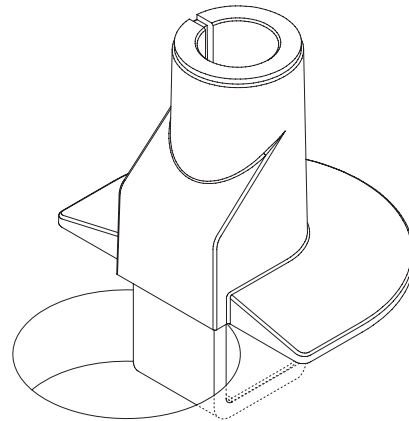

OR


2

6mm  
Tighten to  
60 in-lbs  
minimum

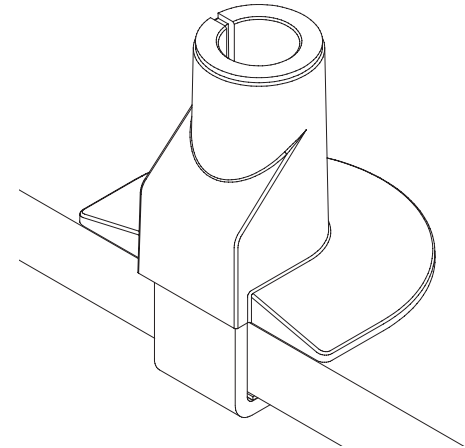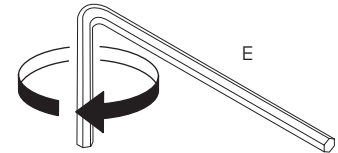


**i** If the monitor arm or pole does not easily fit into the mount, remove the bushing from the mount and place it on the monitor arm or pole and press firmly back into the mount.


2a



2b




2c

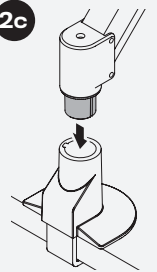



THRU-DESK CONFIGURATION\*


3

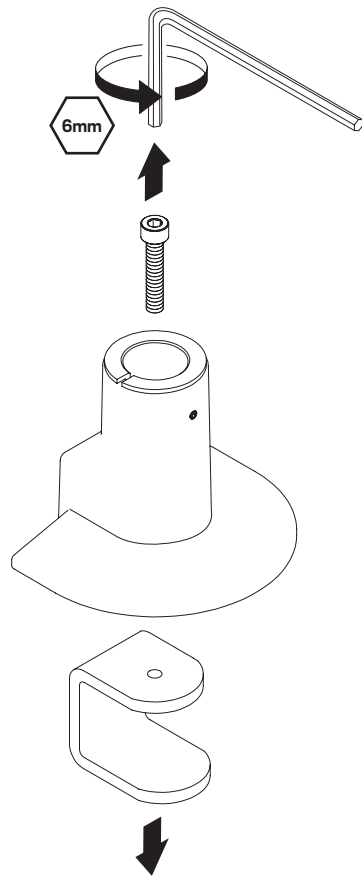





4

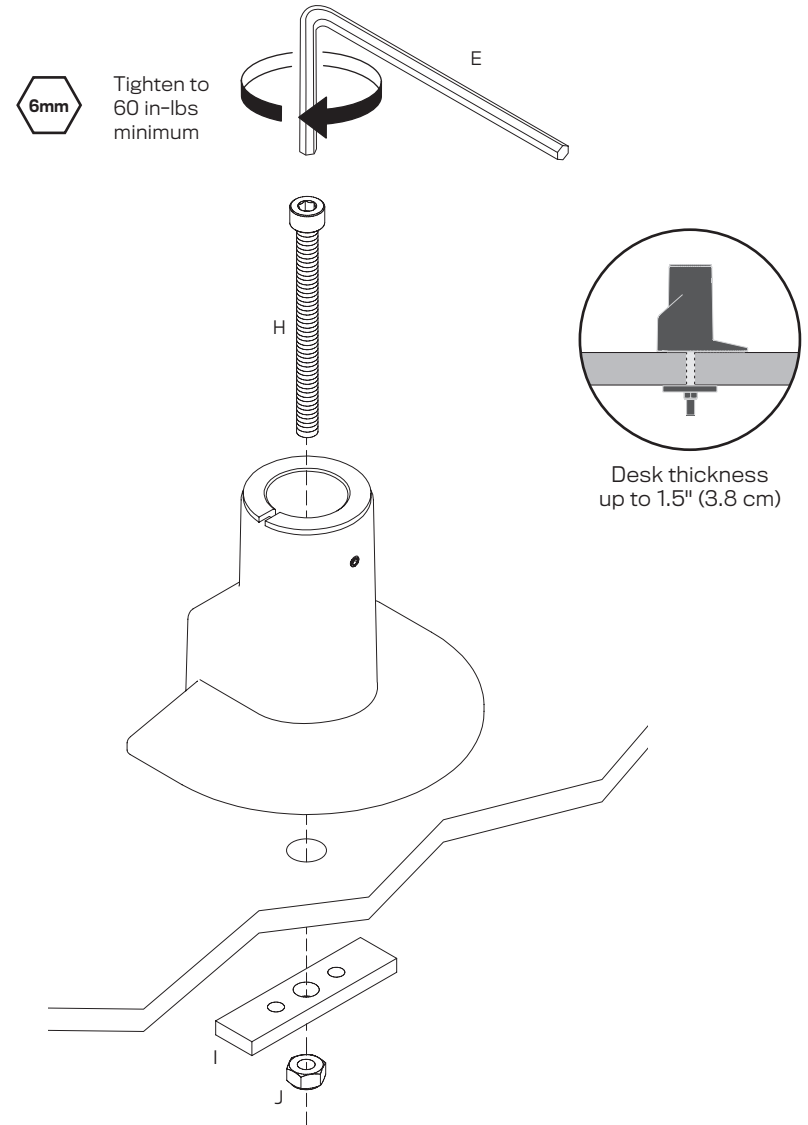

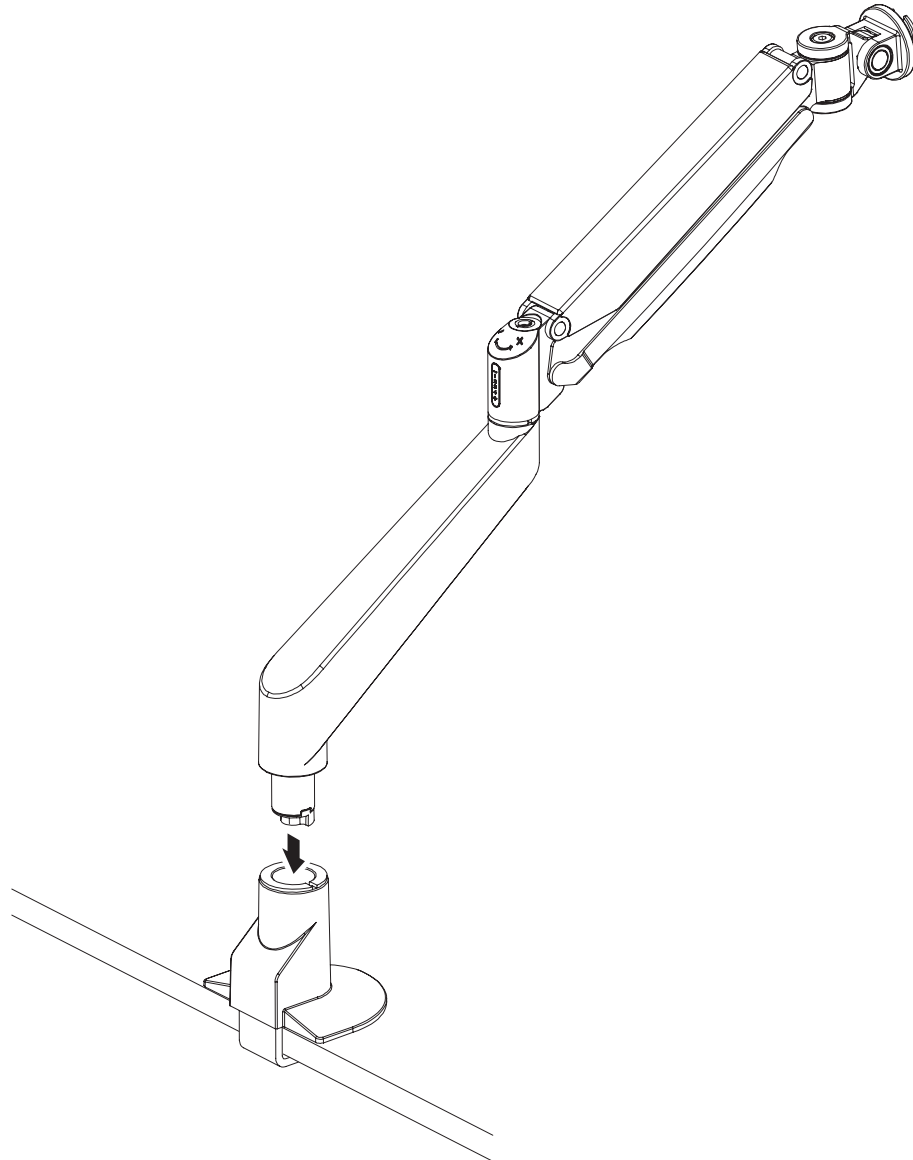


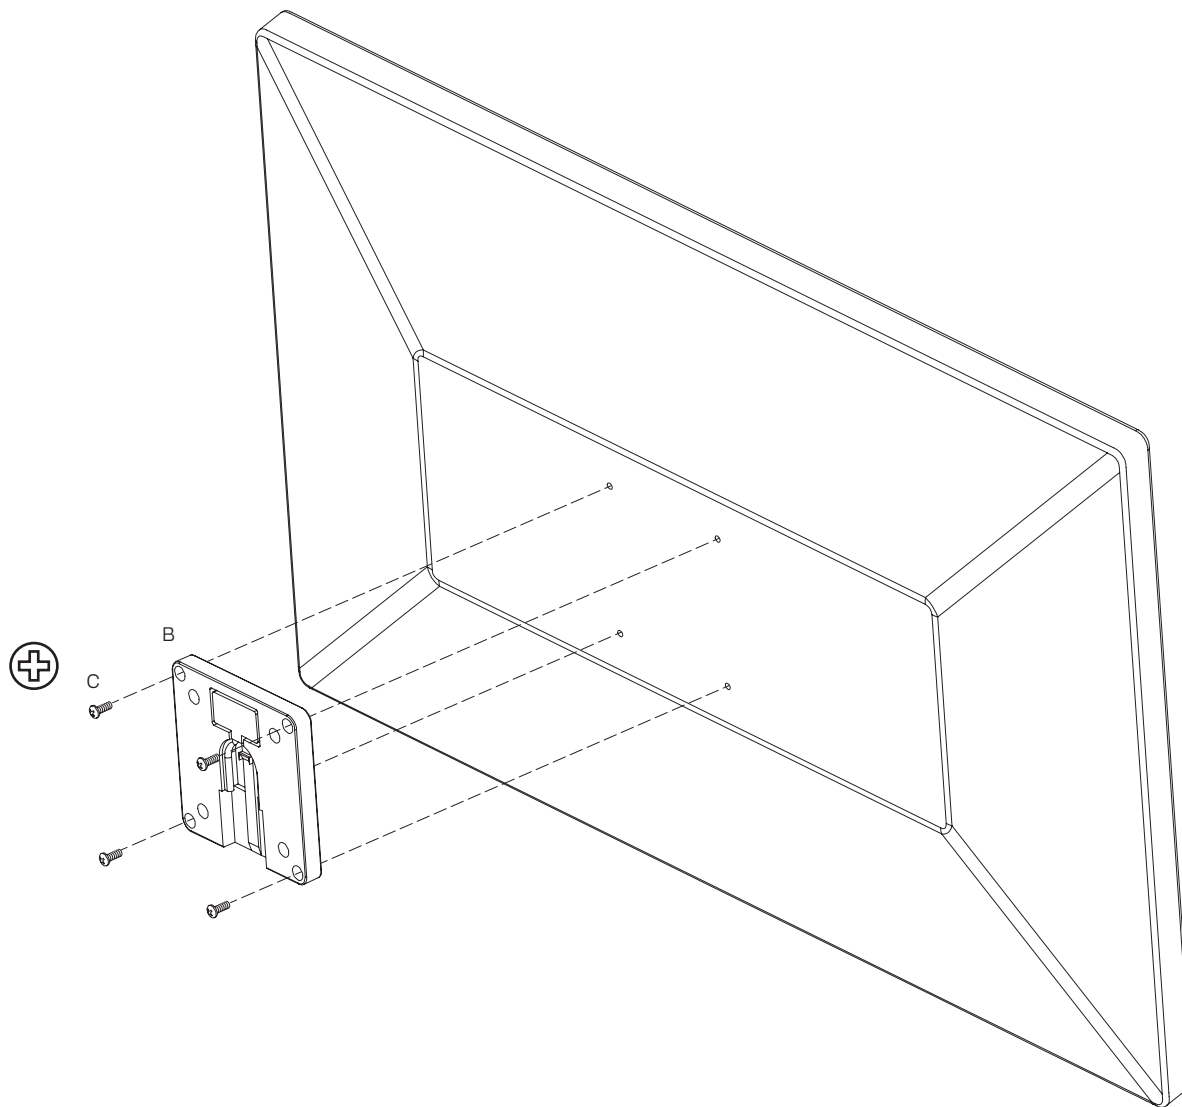

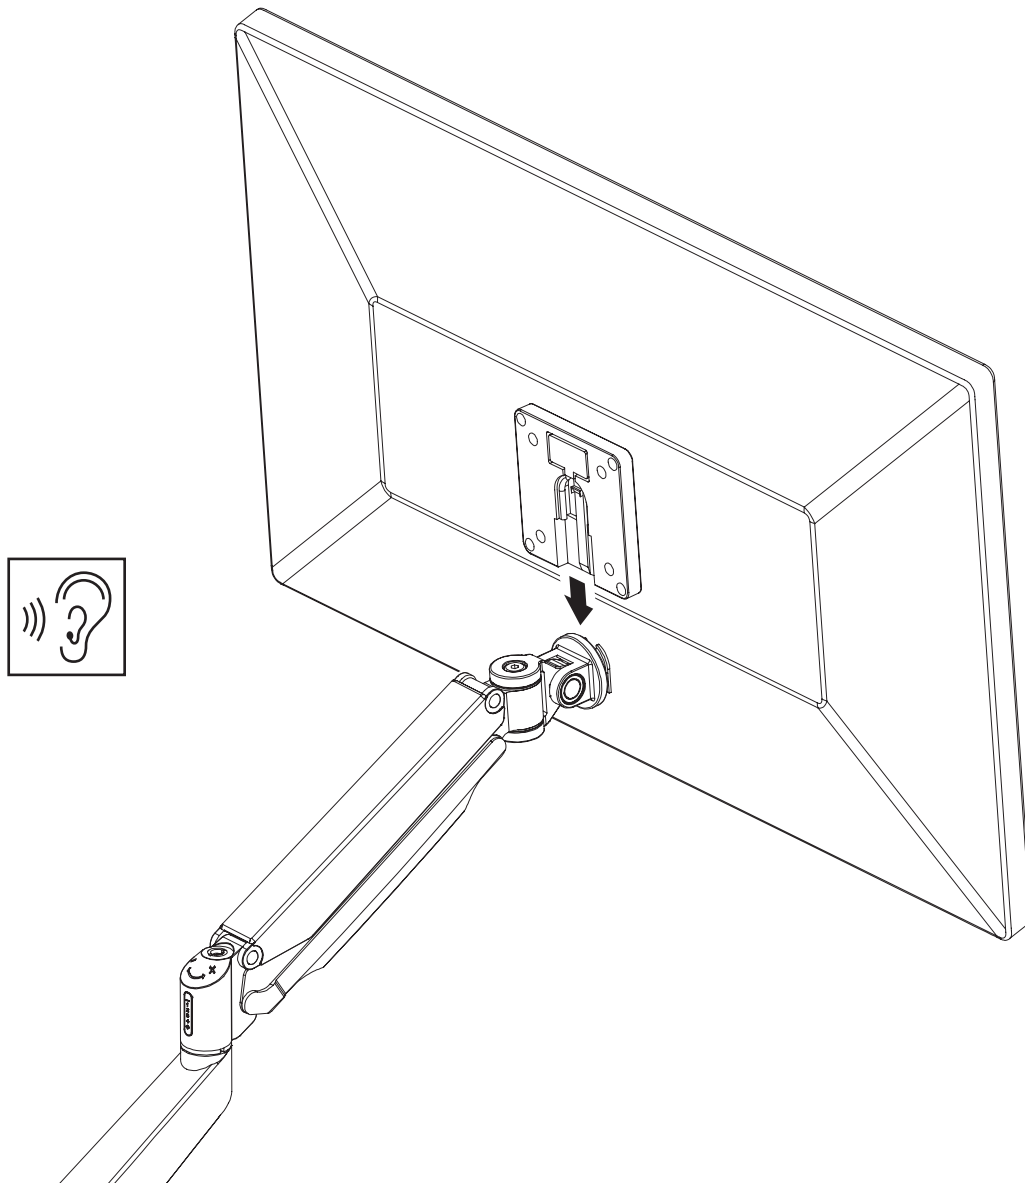

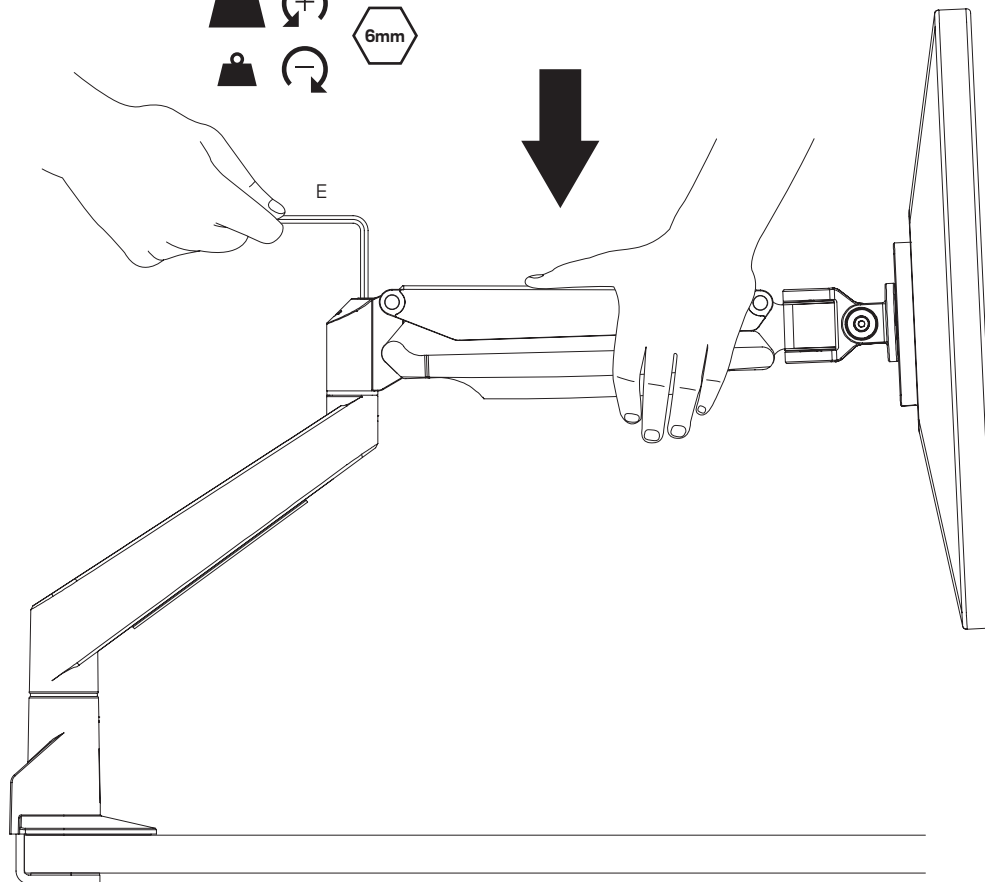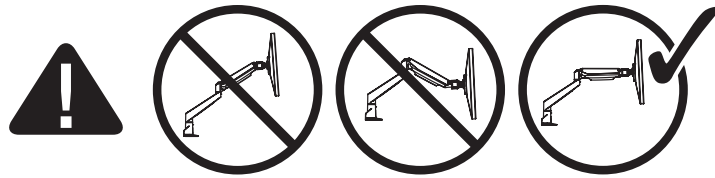



**i** TENSION INDICATOR

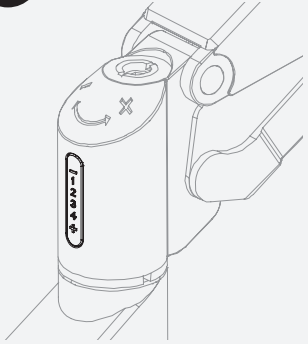



The tension indicator can be used to quickly set multiple arms that will be utilizing the same monitor weight to the correct tension.

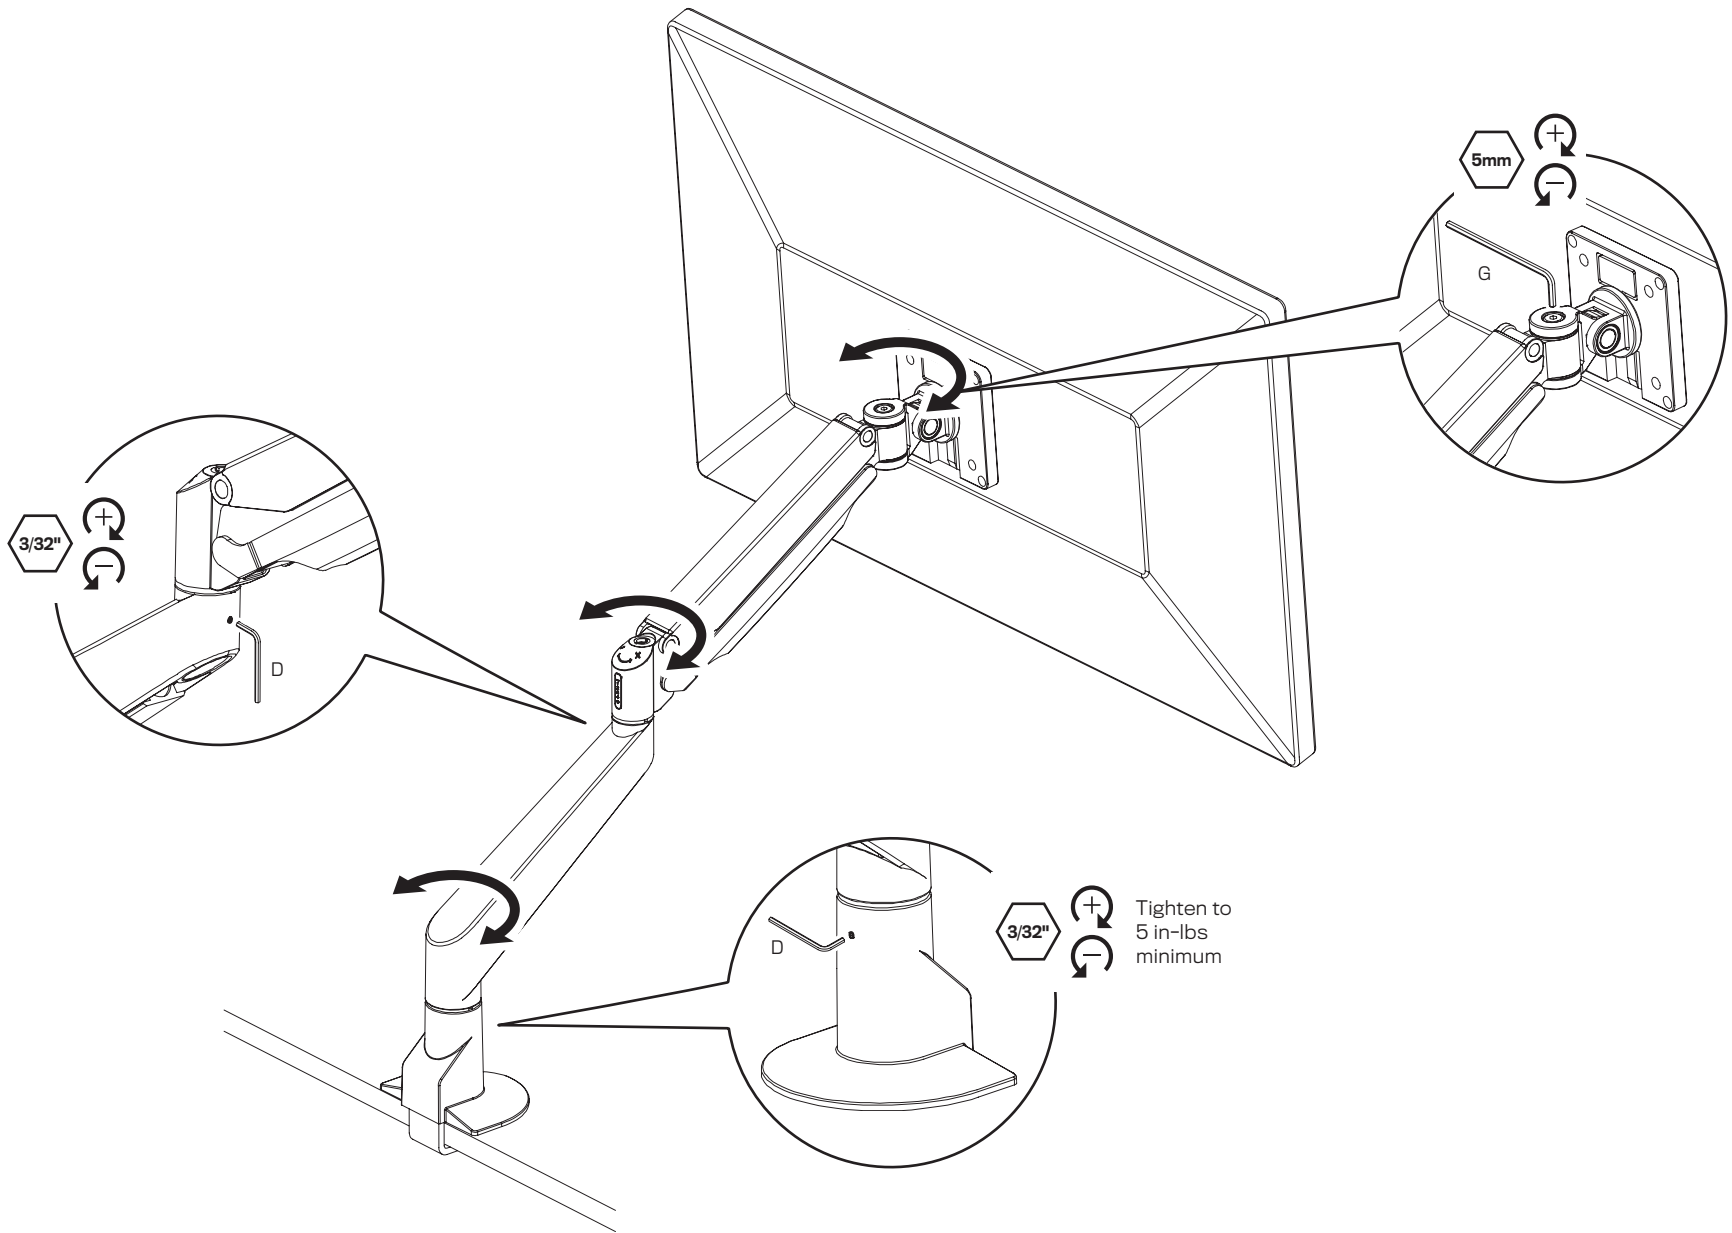

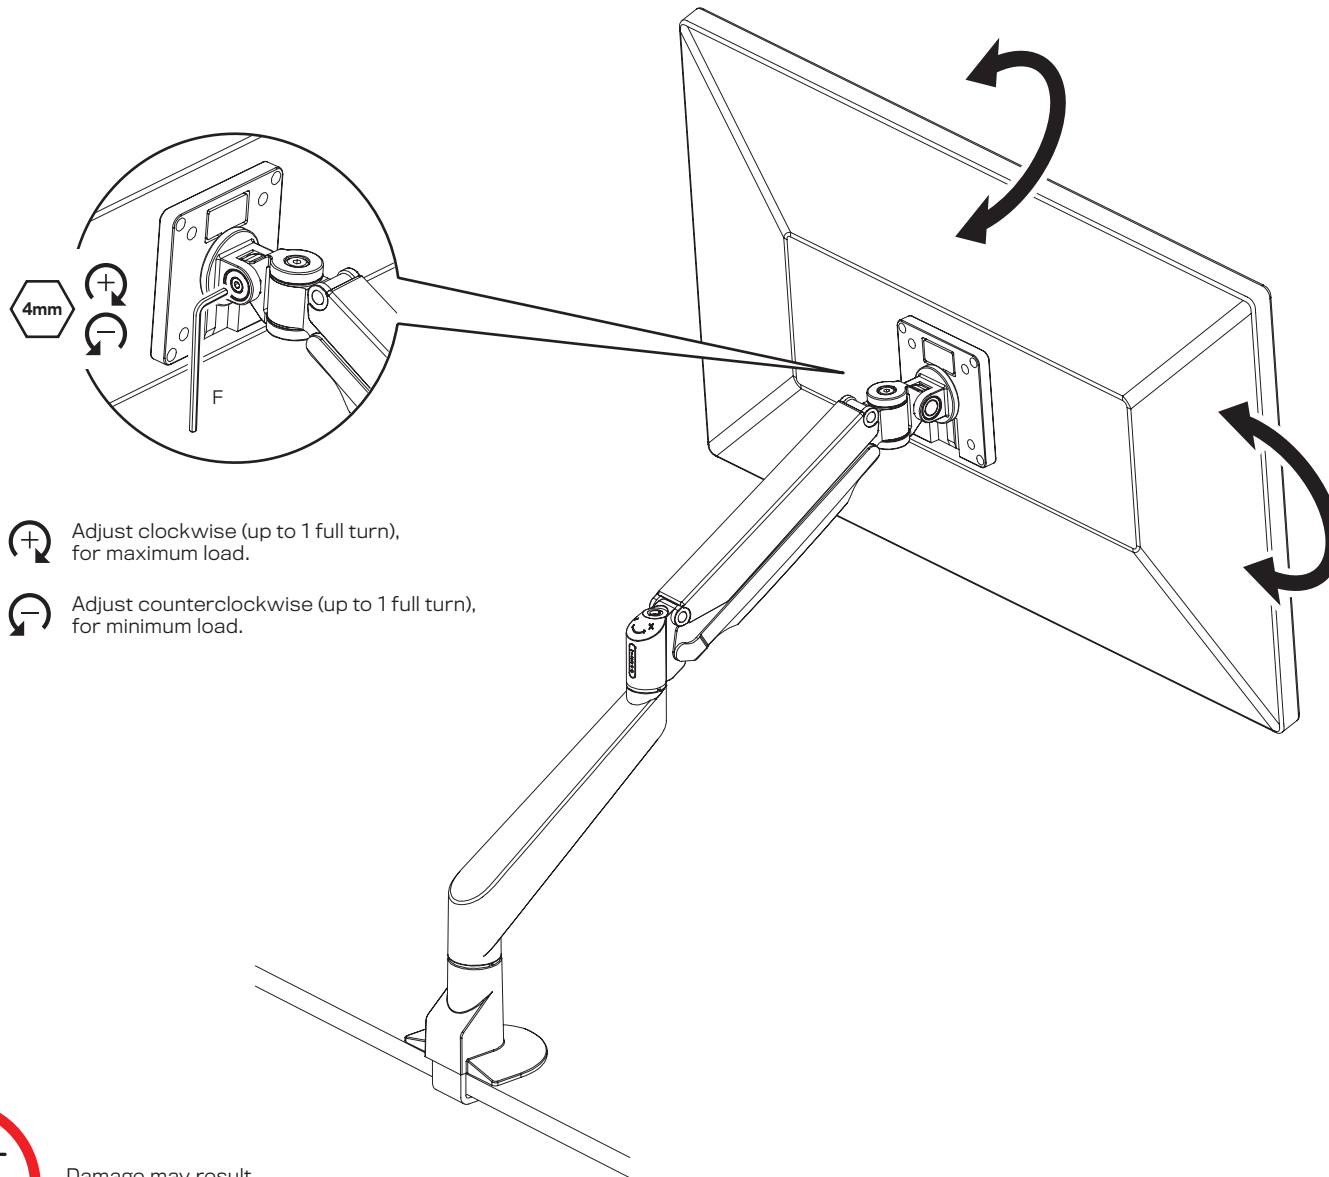



-  Adjust clockwise (up to 1 full turn), for maximum load.
-  Adjust counterclockwise (up to 1 full turn), for minimum load.



Damage may result,  
due to overtightening.

